


Float Ball Valve

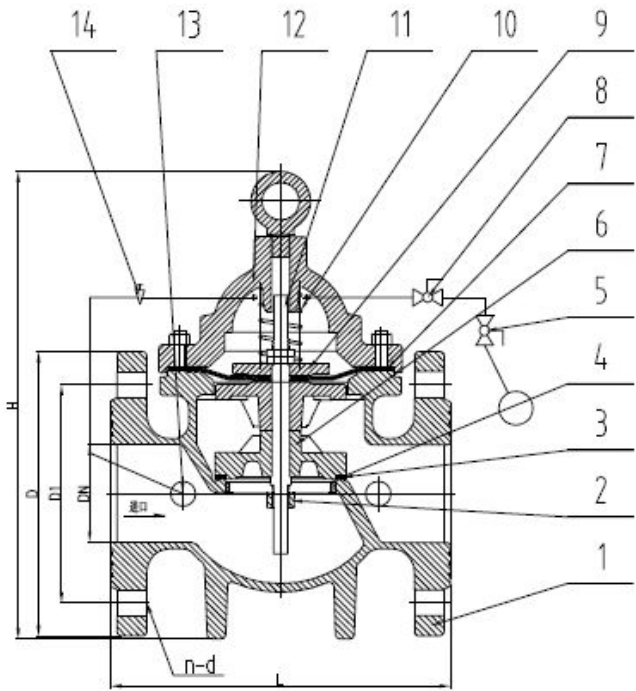


- 1、Design standard: EN1074-5:2000
- 2、Flange Standard: EN1092-1:2018
- 3、Length Perform: Enterprise Standard
- 4、Test Perform: T13927-2008

No.	Part Name	Material	No.	Part Name	Material
1	Valve Body	Ductile cast iron	8	Valve body	Copper
2	Valve seat	Copper\Stainless Steel	9	Valve Plate	Copper\Stainless Steel
3	Gasket	NBR	10	Spring	Stainless Steel
4	Valve plate	Copper\Stainless Steel	11	Stem	Stainless Steel
5	Float Ball	Bronze	12	Bonnet	Ductile iron
6	Valve disk	Copper\Stainless Steel	13	Filter	Stainless Steel
7	Diaphragm	NBR	14	Needle valve	Copper

DN	L	H	PN 10			PN 16		
			D	D1	n-d	D	D1	n-d
50	203	210	165	125	4-19	165	125	4-19
65	222	215	185	145	4-19	185	145	4-19
80	241	245	200	160	8-19	200	160	8-19

100	292	305	220	180	8-19	220	180	8-19
125	330	365	250	210	8-19	250	210	8-19
150	356	415	285	240	8-23	285	240	8-23
200	446	510	340	295	8-23	340	295	12-23
250	505	560	395	350	12-23	405	355	12-28
300	585	659	445	400	12-23	460	410	12-28
350	625	696	505	460	16-23	520	470	16-28
400	745	735	565	515	16-28	580	525	16-31
450	825	610	615	565	20-28	640	585	20-31
500	914	665	670	620	20-28	715	650	20-34
600	1067	725	780	725	20-31	840	770	20-37
700	1300	686	895	840	24-31	910	840	24-37
800	1450	975	1015	950	24-34	1025	950	24-40

可调式减压阀

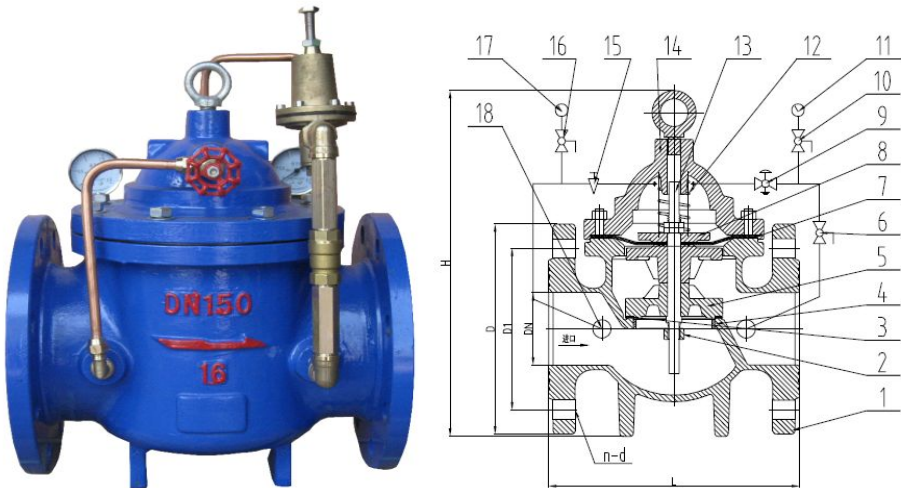

- 1、设计标准：CJ/T219-2005
- 2、法兰尺寸标准：GB/T17241.6-2008
- 3、结构长度标准：企业标准
- 4、试验标准：GB/T13927-2008

序号	零件名称	材质	序号	零件名称	材质
1	阀体	球墨铸铁	10	球阀	铜
2	阀座	球墨铸铁	11	压力表	组合件
3	密封垫	丁晴橡胶	12	压缩弹簧	不锈钢铜
4	密封垫压板	球墨铸铁	13	阀杆	不锈钢铜、
5	阀盘	球墨铸铁	14	阀盖	球墨铸铁
6	球阀	铜	15	针型阀	铜
7	膜片	强化橡胶	16	球阀	铜
8	膜片压板	球墨铸铁	17	压力表	组合件
9	导阀	铜	18	微型过滤器	不锈钢、铜

DN	L	H	PN 10			PN 16		
			D	D1	n-d	D	D1	n-d
50	203	210	165	125	4-19	165	125	4-19

65	222	215	185	145	4-19	185	145	4-19
80	241	245	200	160	8-19	200	160	8-19
100	292	305	220	180	8-19	220	180	8-19
125	330	365	250	210	8-19	250	210	8-19
150	356	415	285	240	8-23	285	240	8-23
200	446	510	340	295	8-23	340	295	12-23
250	505	560	395	350	12-23	405	355	12-28
300	585	659	445	400	12-23	460	410	12-28
350	625	696	505	460	16-23	520	470	16-28
400	745	735	565	515	16-28	580	525	16-31
450	825	610	615	565	20-28	640	585	20-31
500	914	665	670	620	20-28	715	650	20-34
600	1067	725	780	725	20-31	840	770	20-37
700	1300	686	895	840	24-31	910	840	24-37
800	1450	975	1015	950	24-34	1025	950	24-40